

IZA500G Rev. F5 Technical Datasheet

ALPR All-in-one AI Camera System

Rev. F5



Key Features and Benefits

- ✓ Designed for Parking, Car Wash, Access Control and Security
- ✓ NVIDIA® Artificial Intelligence (AI) GPU processor for lightning fast processing at the edge
- ✓ RoadView video analytics on edge for in-depth vehicle analysis
- ✓ Integrated with IZCloud
- ✓ Dual sensor provides multiple paths to perfect ALPR reads
- ✓ Multi-flash technology for greater read accuracy and capture under all conditions
- ✓ Motorized zoom and auto-focus - the key to optimized remote tuning
- ✓ Anti-glare technology for all lighting environments
- ✓ Wide temperature range - operating from -22°F to 140°F (-30°C to 60°C)
- ✓ IP67 ingress protection against extreme moisture
- ✓ IK10 vandal-proof casting for efficient, worry-free operation
- ✓ NDAA Section 889 compliant

Specifications

Item	Specification	
Supported Analytics	LPR Analytics	Plate Recognition, State Identification, Plate Type
	Vehicle Analytics	Vehicle Detection, Classification, Color, Make; Vehicle Without Plate
Field of View (FOV)	12 ft (H) x 8 ft (V) (3.7 x 2.4 m)	
Max Vehicle Speed	Up to 80 mph (129 km/h)	
LPR Capture Distance* (for U.S.A. plates)	<ul style="list-style-type: none"> S - Short distance, 5-35 ft (1.5-11 m) L - Long distance, 30-70 ft (9-21 m) 	
LPR Illumination	Number of LEDs	<ul style="list-style-type: none"> DR, IR - 15 high power LEDs DRW, IRW - 10 high power LEDs
	Wavelength	<ul style="list-style-type: none"> DR - Deep Red IR - Infrared
	Beam Angle	<ul style="list-style-type: none"> S - 40°x16° L - 15°x15°
LPR Camera	Shutter Type	Global
	Sensor	Sony IMX265
	Resolution	2 MP - 1920 (H) x 1080 (V)
	Lens	<ul style="list-style-type: none"> S - 6-22 mm; Motorized Zoom and Auto-focus L - 12-40 mm; Motorized Zoom and Auto-focus
	Video Compression	MJPEG, H.264, H.265
	Video Streaming	RTSP Protocol
OV Illumination	Number of LEDs	<ul style="list-style-type: none"> DR, IR - No visible light LEDs DRW, IRW - 5 high power LEDs
	Wavelength	<ul style="list-style-type: none"> DR, IR - N/A DRW, IRW - Visible, Warm White
	Beam Angle	<ul style="list-style-type: none"> S - 40°x16° L - 15°x15°

Item	Specification
OV Camera	Shutter Type
	Sensor
	Resolution
	Lens
	Video Compression
	Video Streaming
Supported Protocols (for additional protocols, see the RoadView documentation)	Inex HTTP API
	Inex Discovery
AI Processor	GPU
	CPU
	RAM
	System Storage
	Data Storage
	Operating System
	RTC Battery
Environmental	Ingress Protection
	Operating Temperature
	Storage Temperature
	Humidity

Item		Specification
Certifications	EMC	FCC Part 15, subpart B; CE
	Interoperability	ONVIF compliant, Profile S
	RoHS	RoHS
	Impact Protection	IK10-rated casting (Vandal-proof)
	Eye Safety	IEC62471 Group 1
	NDAA	NDAA Section 889 compliant
Physical	Dimensions	(W x H x D) 6.7" x 4.7" x 17.7" (171 x 119 x 451 mm)
	Weight	9.0 lbs (4.1 kg)
	Color	White
Interface	Ethernet	GigE Ethernet (10/100/1000M)
	Cables	LAN - 6.6 (2 m) cable included with camera, terminated with a male RJ-45 connector; can be extended with: CAT 6, shielded Ethernet cable, 4 pairs, 22 AWG, max. length 328 ft (100 m), OD 5.5-7.9 mm
		Power/Signals (PAS) - 6.6 (2 m) cable included with camera; can be extended with: 22 AWG, OD 3.0-7.3 mm <ul style="list-style-type: none"> 3-wire power cable, shielded with a polyethylene jacket; ends terminated with metal rings Digital input (trigger) signal wires and relay output connections (see next items)
	Digital Inputs (Trigger)	<ul style="list-style-type: none"> Trigger Dry: White (+), Green (-) Trigger Wet: Green (+5-12 V), Blue (GND)
	Relay Output	<ul style="list-style-type: none"> Dry Contact Relay: Brown (NO), Orange (C)
Power	Input Voltage	24 VDC +/- 10%, Class 2 Low-Voltage
	Power Consumption	25 W
Accessories Included		Sunshade

Item	Specification
Accessories Available	DIN Rail Mount Power Supplies (IZPWR)
	Digital I/O Controller (IZIO)
	Different <u>mount options</u> available

* LPR Capture Distance is measured from camera to plate

** 64 GB minimum guaranteed


Ordering Information

Part Number	Description
IZA500G-S-DR	5-35 ft (1.5-11 m) range, Deep Red illumination, 24 VDC input voltage
IZA500G-S-DRW	5-35 ft (1.5-11 m) range, Deep Red & Visible Light illumination, 24 VDC input voltage
IZA500G-S-IR	5-35 ft (1.5-11 m) range, Infrared illumination, 24 VDC input voltage
IZA500G-S-IRW	5-35 ft (1.5-11 m) range, Infrared & Visible Light illumination, 24 VDC input voltage
IZA500G-L-DR	30-70 ft (9-21 m) range, Deep Red illumination, 24 VDC input voltage
IZA500G-L-DRW	30-70 ft (9-21 m) range, Deep Red & Visible Light illumination, 24 VDC input voltage
IZA500G-L-IR	30-70 ft (9-21 m) range, Infrared illumination, 24 VDC input voltage
IZA500G-L-IRW	30-70 ft (9-21 m) range, Infrared & Visible Light illumination, 24 VDC input voltage




Standard Package Contents

- IZA500G ALPR All-in-one AI Camera System


IZA500G-S/L-DRW, IRW LED Positions

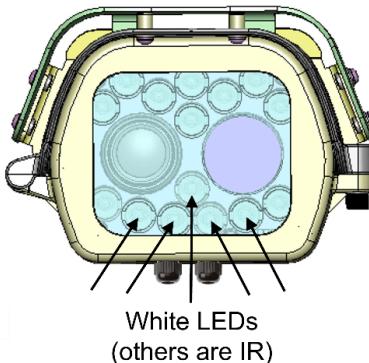

Dimensions (inches/cm)

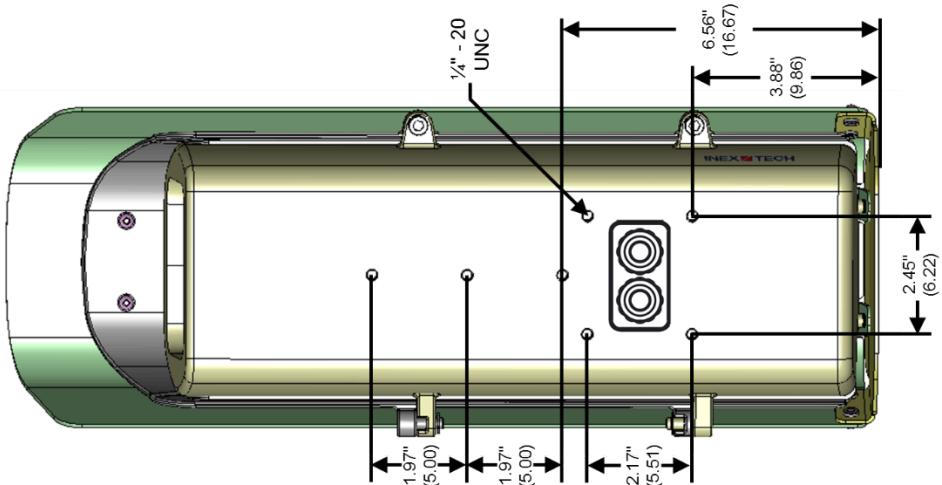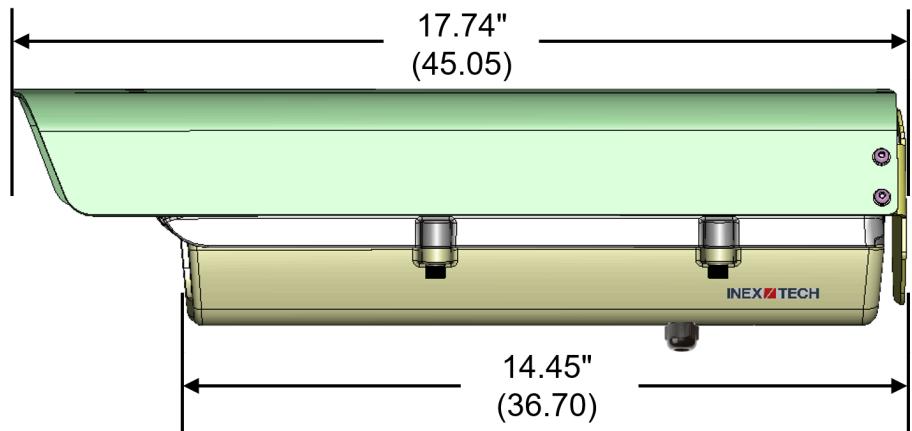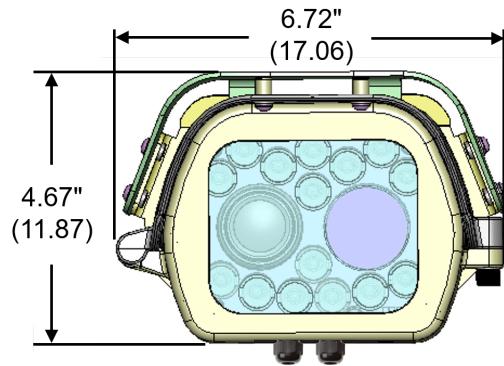

LAN and Power/Signals Cable Details

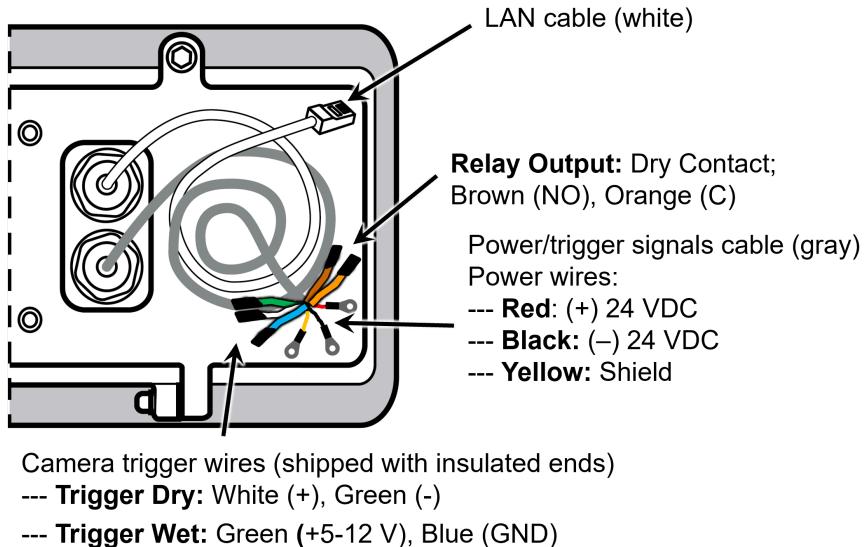

Inex Technologies, LLC
155 Willowbrook Blvd., Suite 130
Wayne, NJ 07470, USA
+1-865-671-1400
www.inextechnologies.com
Sales@inextechnologies.com
Support@inextechnologies.com

© Inex Technologies, LLC - All rights reserved. Specifications are subject to change without notice. All third-party trademarks are the property of their respective owners.

Doc. No. IZA500G-REV-F5-TDSHEET Ver. 2026-01-04

This page was built using the Antora default UI.

The source code for this UI is licensed under the terms of the MPL-2.0 license.